



Linde Material Handling

*Linde*



## Order Picker

# SEMI-AUTOMATED

Capacity 2.0–2.5 t | Series 1115–4587

### Productive co-drivers

- Semi-automated driving modes increase picking efficiency by up to 20 percent
- Eliminating the need to step on and off the vehicle reduces operator walking distances
- Increased operator concentration increases picking performance and reduces errors
- Two driving modes „walk with me“ and „continuous“ cover most customer applications
- More efficient through partial automation without having to change existing processes

# TECHNICAL DATA (According to VDI 2198)

| Characteristics | 1.1    | Manufacturer                                                       |               | LINDE                                | LINDE                                | LINDE                                | LINDE                                                | LINDE                                                |
|-----------------|--------|--------------------------------------------------------------------|---------------|--------------------------------------|--------------------------------------|--------------------------------------|------------------------------------------------------|------------------------------------------------------|
|                 | 1.2    | Manufacturer's type designation                                    |               | N20 B SA                             | N20 SA                               | N25 SA                               | N20 C SA                                             | N25 C SA                                             |
|                 | 1.2a   | Series                                                             |               | 1115-00                              | 1115-00                              | 1115-00                              | 4587                                                 | 4587                                                 |
| Weights         | 1.3    | Power unit                                                         |               | Battery                              | Battery                              | Battery                              | Battery                                              | Battery                                              |
|                 | 1.4    | Operation                                                          |               | Order Picker                         | Order Picker                         | Order Picker                         | Order picker                                         | Order picker                                         |
|                 | 1.5    | Load capacity/Load                                                 | Q (t)         | 2.0                                  | 2.0                                  | 2.5                                  | 2.0                                                  | 2.5                                                  |
| Wheels/Tyres    | 1.6    | Load centre distance                                               | c (mm)        | 600                                  | 600                                  | 1200                                 | 1200                                                 | 1200                                                 |
|                 | 1.8    | Axle centre to fork face                                           | x (mm)        | 900/970 <sup>1) 2)</sup>             | 900/970 <sup>1) 2)</sup>             | 1.775/1.845 <sup>1) 2)</sup>         | 1615 <sup>14)</sup>                                  | 1615 <sup>14)</sup>                                  |
|                 | 1.9    | Wheelbase                                                          | y (mm)        | 2.609/2.717 <sup>2) 3) 4)</sup>      | 2.609/2.717 <sup>2) 3) 4)</sup>      | 2.609/2.717 <sup>2) 3) 4)</sup>      | 2717 <sup>14) 15)</sup>                              | 2717 <sup>14) 15)</sup>                              |
| Dimensions      | 2.1    | Service weight                                                     | (kg)          | 953 <sup>5)</sup>                    | 953 <sup>5)</sup>                    | 996 <sup>5)</sup>                    | 1268 <sup>14)</sup>                                  | 1293 <sup>14)</sup>                                  |
|                 | 2.2    | Axle load with load, front/rear                                    | (kg)          | 1.303/1.650 <sup>5)</sup>            | 1.303/1.650 <sup>5)</sup>            | 1.503/1.993 <sup>5)</sup>            | 1210/2058                                            | 1278/2515                                            |
|                 | 2.3    | Axle load without load, front/rear                                 | (kg)          | 821/132 <sup>5)</sup>                | 821/132 <sup>5)</sup>                | 841/155 <sup>5)</sup>                | 987/281                                              | 996/297                                              |
| Performance     | 3.1    | Tyres rubber, SE, pneumatic, polyurethane                          |               | R+P/P                                | R+P/P                                | R+P/P                                | P/P                                                  | P/P                                                  |
|                 | 3.2    | Tyre size, front                                                   |               | Ø 254 × 102                          | Ø 254 × 102                          | Ø 254 × 102                          | Ø 254 × 102                                          | Ø 254 × 102                                          |
|                 | 3.3    | Tyre size, rear                                                    |               | Ø 85 × 80                            | Ø 85 × 80                            | Ø 85 × 80                            | Ø 85 × 100                                           | Ø 85 × 80                                            |
| Others          | 3.4    | Auxiliary wheels (dimensions)                                      |               | 2x Ø 140 × 50                        | 2x Ø 140 × 50                        | 2x Ø 140 × 50                        | Ø 150 × 50                                           | Ø 150 × 50                                           |
|                 | 3.5    | Wheels, number front/rear (x = driven)                             |               | 1x + 1/2<br>(1x + 1/4) <sup>6)</sup> | 1x + 1/2<br>(1x + 1/4) <sup>6)</sup> | 1x + 1/2<br>(1x + 1/4) <sup>6)</sup> | 1x - 1/2                                             | 1x - 1/4                                             |
|                 | 3.6    | Track width, front                                                 | b10 (mm)      | 491 <sup>2)</sup>                    | 491 <sup>2)</sup>                    | 491 <sup>2)</sup>                    | 474                                                  | 474                                                  |
| Drive           | 3.7    | Track width, rear                                                  | b11 (mm)      | 355<br>(375/395/515) <sup>2)</sup>   | 355<br>(375/395/515) <sup>2)</sup>   | 355<br>(375/395/515) <sup>2)</sup>   | 348<br>(368/388/498)                                 | 348 (368/388/498)                                    |
|                 | 4.4    | Lift                                                               | h3 (mm)       | 115                                  | 115                                  | 115                                  | 130                                                  | 130                                                  |
|                 | 4.8    | Seat height relating to SIP/stand height                           | h7 (mm)       |                                      | -                                    | -                                    | 130                                                  | 130                                                  |
| Performance     | 4.9    | Height drawbar in driving position min./max.                       | h14 (mm)      |                                      |                                      |                                      | 1258 <sup>14)</sup>                                  | 1258 <sup>14)</sup>                                  |
|                 | 4.15   | Height, lowered                                                    | h13 (mm)      | 85 <sup>7)</sup>                     | 85 <sup>7)</sup>                     | 85 <sup>7)</sup>                     | 85                                                   | 85                                                   |
|                 | 4.19   | Overall length                                                     | l1 (mm)       | 2.500 <sup>2) 8)</sup>               | 2.500 <sup>2) 8)</sup>               | 3.750 <sup>2) 8)</sup>               | 3860 <sup>15)</sup>                                  | 3860 <sup>15)</sup>                                  |
| Drive           | 4.20   | Length to fork face                                                | l2 (mm)       | 1.350 <sup>2) 4)</sup>               | 1.350 <sup>2) 4)</sup>               | 1.350 <sup>2) 4)</sup>               | 1470 <sup>15)</sup>                                  | 1470 <sup>15)</sup>                                  |
|                 | 4.21   | Overall width                                                      | b1/b2 (mm)    | 790 <sup>2)</sup>                    | 790 <sup>2)</sup>                    | 790 <sup>2)</sup>                    | 822                                                  | 822                                                  |
|                 | 4.22   | Fork dimensions DIN ISO 2331                                       | s/e/l (mm)    | 55 × 165 × 1.150 <sup>2)</sup>       | 55 × 165 × 1.150 <sup>2)</sup>       | 55 × 165 × 2.400 <sup>2)</sup>       | 61 (78 max)/<br>172/2390                             | 61 (78 max)/<br>172/2390                             |
| Performance     | 4.25   | Fork spread                                                        | b5 (mm)       | 520 (540/560/680) <sup>2)</sup>      | 520 (540/560/680) <sup>2)</sup>      | 520 (540/560/680) <sup>2)</sup>      | 520 (540/560/670)                                    | 520 (540/560/670)                                    |
|                 | 4.32   | Ground clearance, centre of wheelbase                              | m2 (mm)       | 160/30 <sup>1) 9)</sup>              | 160/30 <sup>1) 9)</sup>              | 160/30 <sup>1) 9)</sup>              | 24/154 <sup>17)</sup>                                | 24/154 <sup>17)</sup>                                |
|                 | 4.33   | Load dimension b12 × l6                                            | b12 × l6 (mm) | 800 × 1.200                          | 800 × 1.200                          | 2 × 800 × 1.200                      | -                                                    | -                                                    |
| Drive           | 4.34   | Aisle width predetermined load dimensions                          | Ast (mm)      | 2.950 <sup>4) 10) 11)</sup>          | 2.950 <sup>4) 10) 11)</sup>          | 4.067 <sup>4) 10) 11)</sup>          | See table in linde world                             | See table in linde world                             |
|                 | 4.34.1 | Aisle width for pallets 1000 × 1200 crossways (fork raised)        | Ast (mm)      | -                                    | -                                    | -                                    | See table in linde world                             | See table in linde world                             |
|                 | 4.34.2 | Aisle width for pallets 800 × 1200 crossways (forks raised)        | Ast (mm)      | -                                    | -                                    | -                                    | See table in linde world                             | See table in linde world                             |
| Performance     | 4.35   | Turning radius                                                     | Wa (mm)       | 2.250/2.320 <sup>1) 4)</sup>         | 2.250/2.320 <sup>1) 4)</sup>         | 3.125/3.195 <sup>1) 4)</sup>         | 3083 <sup>14)</sup> /<br>2975 <sup>14) 15) 17)</sup> | 3083 <sup>14)</sup> /<br>2975 <sup>14) 15) 17)</sup> |
|                 | 5.1    | Travel speed, with/without load                                    | (km/h)        | 10/12 <sup>12)</sup>                 | 10/12 <sup>12)</sup>                 | 10/12 <sup>12)</sup>                 | 9/12 <sup>18)</sup>                                  | 9/12 <sup>18)</sup>                                  |
|                 | 5.1.1  | Travel speed, with/without load, backwards                         | (km/h)        | 10/10 <sup>12)</sup>                 | 10/10 <sup>12)</sup>                 | 10/10 <sup>12)</sup>                 | 8/11                                                 | 8/11                                                 |
| Drive           | 5.1.2  | Travel speed, with/without load, backwards                         | (km/h)        | 6                                    | 6                                    | 6                                    | 6                                                    | 6                                                    |
|                 | 5.2    | Lifting speed, with/without load                                   | (m/s)         | 0.060/0.070 <sup>5)</sup>            | 0.060/0.070 <sup>5)</sup>            | 0.060/0.070 <sup>5)</sup>            | 0.070/0.111                                          | 0.064/0.089                                          |
|                 | 5.3    | Lowering speed, with/without load                                  | (m/s)         | 0.060/0.080 <sup>5)</sup>            | 0.060/0.080 <sup>5)</sup>            | 0.060/0.080 <sup>5)</sup>            | 0.084/0.067                                          | 0.068/0.066                                          |
| Performance     | 5.8    | Maximum climbing ability, with/without load                        | %             | 16.0/13.0                            | 16.0/13.0                            | 14.0/13.0                            | 7.0/12.0 <sup>19) 20)</sup>                          | 7.0/12.0 <sup>19) 20)</sup>                          |
|                 | 5.9    | Acceleration time, with/without load                               | s             | 5.8/4.5                              | 5.8/4.5                              | 5.8/4.5                              | 6.1/4.8                                              | 6.4/4.8                                              |
|                 | 5.10   | Service brake                                                      |               | Electric/hydraulic                   | Electric/hydraulic                   | Electric/hydraulic                   | Electromagnetic                                      | Electromagnetic                                      |
| Others          | 6.1    | Drive motor rating S2 60 min                                       | (kW)          | 3                                    | 3                                    | 3                                    | 3                                                    | 3                                                    |
|                 | 6.2    | Lift motor rating at S3 15 %                                       | (kW)          | 1.2/15%                              | 1.2/15%                              | 1.5/15%                              | 2.2/5%                                               | 2.2/5%                                               |
|                 | 6.3    | Battery according to DIN 43531/35/36 A, B, C, no                   |               | 43 535/3 PzS                         | 43 535/3 PzS                         | 43 535/3 PzS                         | no                                                   | no                                                   |
| Performance     | 6.4    | Battery voltage/ rated capacity (5 h)                              | (V)/(Ah)      | 24/345-375                           | 24/345-375                           | 24/345-375                           | 24/345 - 465                                         | 24/345 - 465                                         |
|                 | 6.5    | Battery weight (± 5 %)                                             | (kg)          | 272/315 <sup>5) 13)</sup>            | 272/315 <sup>5) 13)</sup>            | 272/315 <sup>5) 13)</sup>            | 402                                                  | 402                                                  |
|                 | 6.6    | Power consumption according to VDI cycle (EN 16796 <sup>*)</sup> ) | (kWh/h)       | 0.5                                  | 0.5                                  | 0.48                                 | 0.45 <sup>*</sup>                                    | 0.48 <sup>*</sup>                                    |
| Drive           | 6.6.1  | CO <sub>2</sub> equivalent emissions                               | (kg/h)        | -                                    | -                                    | -                                    | 0.2                                                  | 0.3                                                  |
|                 | 6.7    | Turnover output according to VDI 2198                              | (t/h)         | 136.0                                | 136.0                                | 162.5                                | 129.0                                                | 157.0                                                |
|                 | 6.8    | Turnover efficiency according to VDI 2198                          | (kwh/h)       | 1.46                                 | 1.46                                 | 1.43                                 | 1.9                                                  | 2.2                                                  |
| Others          | 8.1    | Type of drive unit                                                 |               | LAC                                  | LAC                                  | LAC                                  | AC control                                           | AC control                                           |
|                 | 10.7   | Sound pressure level LpAZ (at the driver's seat)                   | (dB(A))       | < 85                                 | < 85                                 | < 85                                 | < 70                                                 | < 70                                                 |

## N20 SA (1115)

1) Forks upraised/lowered

2) (± 5 mm)

3) With/without Initial lift

4) Values for 3 PzS batteries. 4 PzS battery = tabled values + 100 mm

5) (± 10%)

6) Figures in parenthesis with tandem load wheels

7) (-0/+5 mm)

8) ± 0 mm = 3 PzS lateral;  
+100 mm = 3 PzS vertical and  
4 PzS lateral; +150 mm = 4 PzS vertical.

9) (± 2 mm)

10) Including a 200 mm (min.) operating aisle clearance.

11) Forks upraised

12) (± 5%)

13) Min./max.

## N20 C SA (4587)

14) With forks lenght 2390 mm / x = 1615 mm/pull bar version; for other forks dimension see table below

15) With tray 4 Pz or Li-ION + 114 mm

16) With tiller adjustment option, h14 setting range = +89 mm/-19 mm


17) With load arms or forks raised

18) Traction speed unladen until 14 km/h available as optional


19) On rounded edge slope with forks/arms raised, if possible

20) For the geometric limit on unrounded edge slope, see table below

**N20 SA**

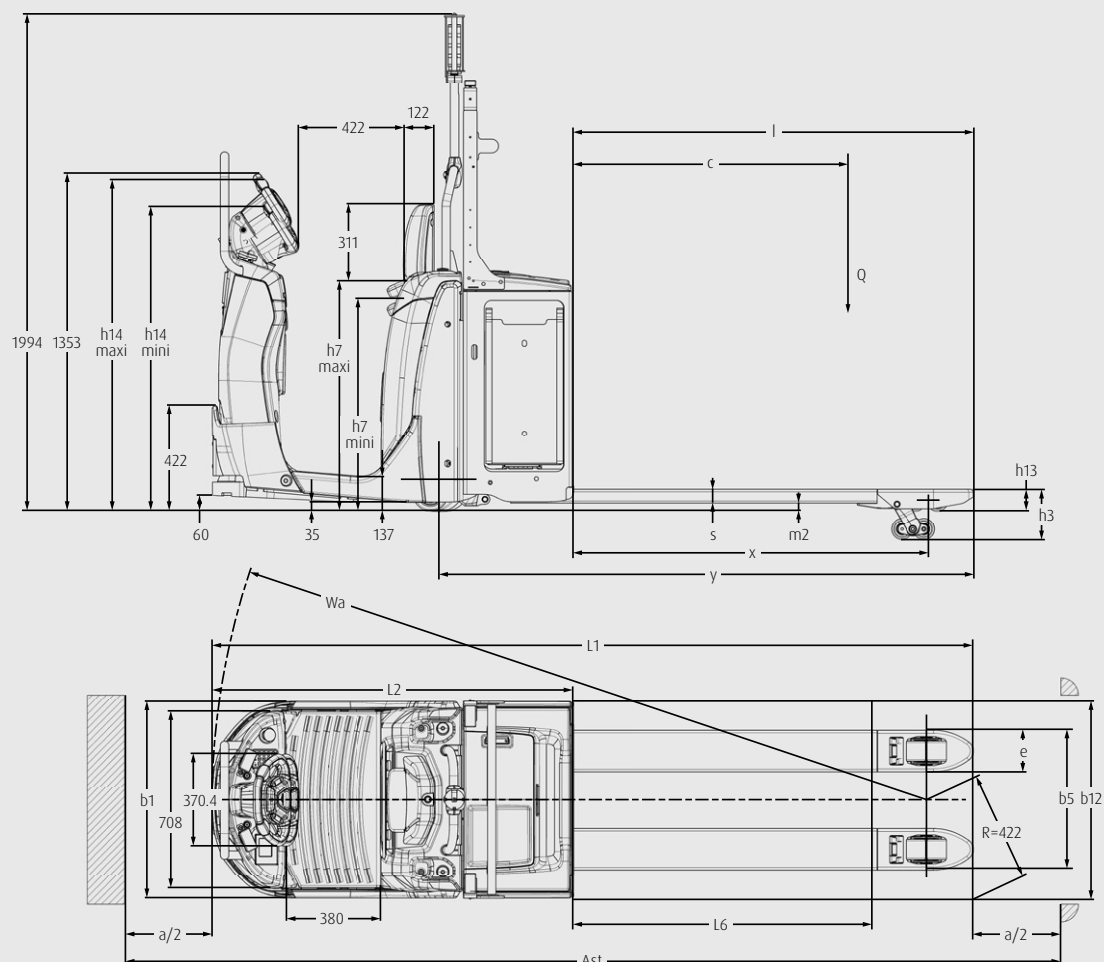

N20 C SA

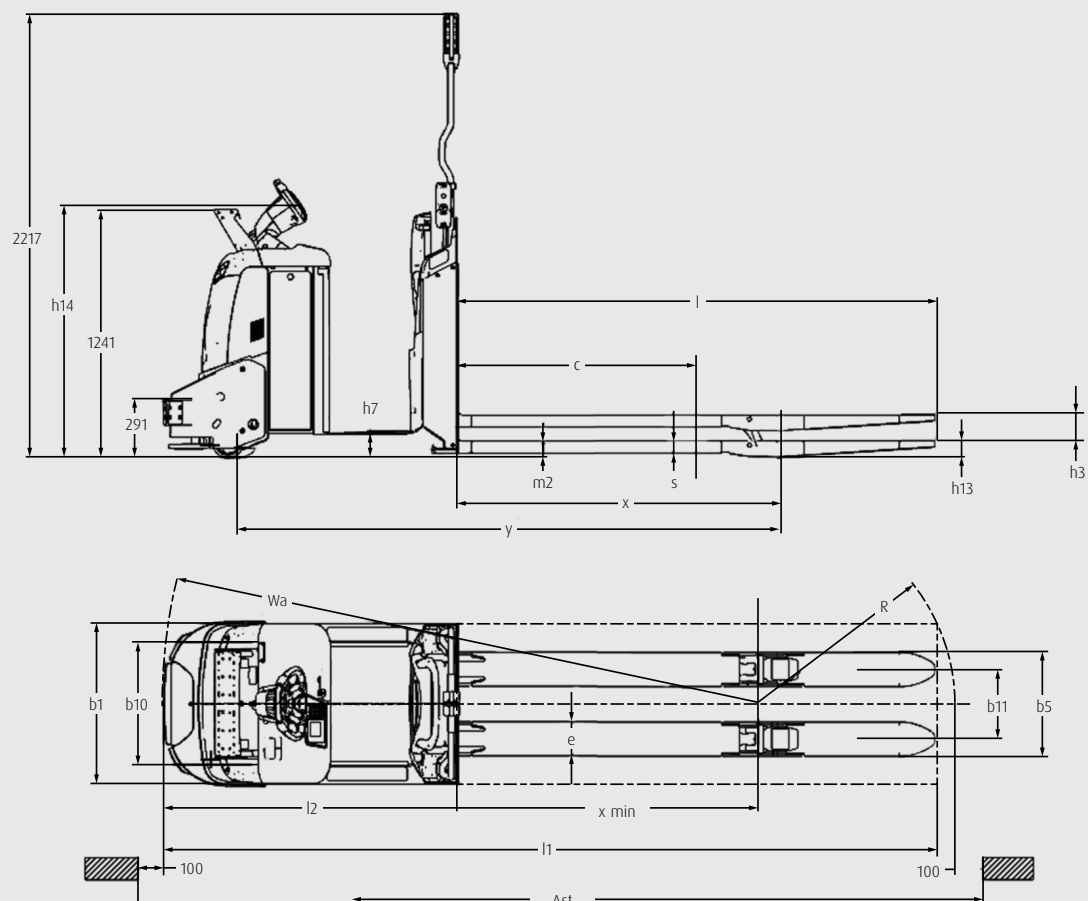

# STANDARD AND OPTIONAL EQUIPMENT

| Model/Equipment                            |                                                                                                                                         | N20 B SA | N20 SA | N25 SA | N20 C SA | N25 C SA |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------|--------|--------|----------|----------|
| Safety                                     | Front casted bumper with integrated safety scanner                                                                                      | ●        | ●      | ●      | ●        | ●        |
|                                            | Low-mounted high level safety scanner                                                                                                   | ●        | ●      | ●      | ●        | ●        |
|                                            | Automatic speed reduction when cornering                                                                                                | ●        | ●      | ●      | ●        | ●        |
|                                            | Lighting pole (mounted on rear accessory support)                                                                                       | ●        | ●      | ●      | ●        | ●        |
|                                            | Linde BlueSpot™                                                                                                                         | ○        | ○      | ○      | ○        | ○        |
|                                            | Front LED light                                                                                                                         | ○        | ○      | ○      | ○        | ○        |
|                                            | Additional emergency buttons located in the rear part                                                                                   | ●        | ●      | ●      | ●        | ●        |
|                                            | Key switch                                                                                                                              | ●        | ●      | ●      | ●        | ●        |
|                                            | Log in PIN code                                                                                                                         | ○        | ○      | ○      | ○        | ○        |
| Operation / Load Handling                  | Follow-me function with walk-with-me mode                                                                                               | ●        | ●      | ●      | ●        | ●        |
|                                            | Stop&Go function with continuous driving mode                                                                                           | ●        | ●      | ●      | ●        | ●        |
|                                            | Rear initial lift control                                                                                                               | ○        | ○      | ○      | ○        | ○        |
|                                            | Initial lift electrical stop sensor                                                                                                     | ●        | ●      | ●      | ●        | ●        |
|                                            | Low speed if initial lift low                                                                                                           | ○        | ○      | ○      | ○        | ○        |
|                                            | Load backrest                                                                                                                           | ○        | ○      | ○      | ○        | ○        |
|                                            | Remote control                                                                                                                          | ○        | ○      | ○      | ○        | ○        |
|                                            | Remote control charger                                                                                                                  | ○        | ○      | ○      | ○        | ○        |
| Digitalisation                             | Linde connect: desk                                                                                                                     | ○        | ○      | ○      | ○        | ○        |
|                                            | ac: access control (PIN or RFID)                                                                                                        | ○        | ○      | ○      | ○        | ○        |
|                                            | dt: crash detection                                                                                                                     | ○        | ○      | ○      | ○        | ○        |
|                                            | an: usage analysis                                                                                                                      | ○        | ○      | ○      | ○        | ○        |
|                                            | Linde connect: cloud                                                                                                                    | ○        | ○      | ○      | ○        | ○        |
|                                            | Basic Package (trouble codes, operating hours, truck mapping)                                                                           | ○        | ○      | ○      | ○        | ○        |
|                                            | Data Transmission (WiFi or Online)                                                                                                      | ○        | ○      | ○      | ○        | ○        |
| Workplace                                  | Fully suspended operator compartment                                                                                                    | —        | ●      | ●      | —        | —        |
|                                            | Damped platform option                                                                                                                  | —        | —      | —      | ○        | ○        |
|                                            | Height adjustable Linde Steering Wheel                                                                                                  | ○        | ○      | ○      | ○        | ○        |
|                                            | Knee protection                                                                                                                         | ●        | ●      | ●      | ○        | ○        |
|                                            | Basic rounded display                                                                                                                   | ●        | —      | —      | —        | —        |
|                                            | Multifunction coloured display hour meter, maintenance indication, battery discharge indicator and internal fault code indication       | —        | ●      | ●      | ●        | ●        |
|                                            | Height adjustable backrest including foldable seating support                                                                           | ○        | ○      | ○      | ○        | ○        |
|                                            | Accessory support front                                                                                                                 | ○        | ○      | ○      | ○        | ○        |
|                                            | Accessory support rear (includes central pole for N20 series)                                                                           | ●        | ●      | ●      | ●        | ●        |
|                                            | Support data terminal and power supply cable 24 V                                                                                       | ○        | ○      | ○      | ○        | ○        |
|                                            | Support clipboard DIN A4 and support for scanner                                                                                        | ○        | ○      | ○      | ○        | ○        |
|                                            | Shrink wrap pole                                                                                                                        | ○        | ○      | ○      | ○        | ○        |
| Attachement / Forks                        | Rear lower storage                                                                                                                      | ○        | ○      | ○      | —        | —        |
|                                            | Fork carriage up to 680 mm (depending on model)                                                                                         | ○        | ○      | ○      | ○        | ○        |
|                                            | Fork length up to 3100 mm (depending on model)                                                                                          | ○        | ○      | ○      | ○        | ○        |
| Overhang up to 975 mm (depending on model) |                                                                                                                                         | ○        | ○      | ○      | ○        | ○        |
| Axles and Tyres                            | Drive wheel Heavy Duty                                                                                                                  | ●        | ●      | ●      | ●        | ●        |
|                                            | Drive wheel High Grip                                                                                                                   | ○        | ○      | ○      | ○        | ○        |
|                                            | Single/tandem load wheels polyurethane (greasable)                                                                                      | ○        | ○      | ○      | ○        | ○        |
|                                            | Standard castor wheel                                                                                                                   | ●        | ●      | ●      | ●        | ●        |
| Drive and Brake-System                     | Power assisted steering                                                                                                                 | ●        | ●      | ●      | ●        | ●        |
|                                            | 3 kW AC motor (maintenance free)                                                                                                        | ●        | ●      | ●      | ●        | ●        |
|                                            | Electromagnetic braking system                                                                                                          | ●        | ●      | ●      | ●        | ●        |
|                                            | Battery compartment, vertical change 3 PzS (300 Ah/375 Ah) and 4 PzS (480 Ah/620 Ah)                                                    | —        | —      | —      | ●        | ●        |
|                                            | Battery compartment, lateral battery change 3 PzS (345 Ah/375 Ah) and 4PzS (460 Ah/500 Ah), including ergonomic lever and metal rollers | ●        | ●      | ●      | ○        | ○        |
|                                            | Battery compartment, side change 3 PzS (345 Ah/465 Ah) and 4 PzS (460 Ah/620 Ah), including ergonomic lever and metal rollers           | ○        | ○      | ○      | ○        | ○        |
|                                            | Battery compartment, Li-ION battery (205 Ah/410 Ah) including side plug for opportunity charging                                        | ○        | ○      | ○      | ○        | ○        |
|                                            | Li-ION 24 V-Chargers                                                                                                                    | ○        | ○      | ○      | ○        | ○        |
| Service                                    | CAN bus technology                                                                                                                      | ●        | ●      | ●      | ●        | ●        |
|                                            | Rack configurations and End-of an aisle stop adjustments                                                                                | ●        | ●      | ●      | ●        | ●        |

● Standard equipment

○ Optional equipment

— Not available



# CHARACTERISTICS



Linde BlueSpot™ and bumper including safety scanner

## Safety

- Various safety systems prevent personal accidents and collisions in semi-automated operation
- Safety scanner at the front of the vehicle also detects obstacles that suddenly appear in front of the order picker
- Four antennas determine the relative position of the operator
- Special protection on the bumper prevents feet from getting under the vehicle
- Pole-mounted lights indicate current driving mode and warn when remote control and vehicle are not coupled
- Vehicle independently maintains distance from racking and stops at the end of the aisle to prevent accidents



Ergonomic remote

## Ergonomics

- Semi-automated operation eliminates the need to repeatedly step on and off the vehicle and prevents fatigue
- Activation of the semi-automated modes is intuitive, safe and easy via remote control
- In "walk with me" mode, the operator can choose from three different positions that activate the vehicle's onward travel to provide the ideal walking path to the pallet



Walk with me or Stop and Go function

## Handling

- In "walk with me" mode, the vehicle follows the operator while picking on one side of the rack, eliminating the walk from the operator's platform to the pallet
- In "continuous" mode, the drive is activated via the remote control and enables convenient order picking on both sides of the rack
- Ultra-wideband connection between the vehicle and the remote control ensures precise localization of the operator and exact reaction of the vehicle to the operator's movements
- Semi-automatic operation is deactivated as soon as the operator drives the vehicle himself



Computerized diagnostic

## Service

- Easy cleaning of the safety scanner
- Vehicle display, lamp post and laser display always provide information on current vehicle status
- Linde diagnostic tool and CAN bus connection enable simple diagnostics in the event of a repair
- Simple setup of the semi-automatic system to application conditions such as aisle width or rack length

Subject to modification in the interest of progress. Illustrations and technical details could include options and not binding for actual constructions. All dimensions subject to usual tolerances.

Presented by:



**Linde Material Handling GmbH**  
Carl-von-Linde-Platz | 63743 Aschaffenburg | Germany  
Phone + 49 6021 99 0 | Fax + 49 6021 99 1570  
[www.linde-mh.com](http://www.linde-mh.com) | [info@linde-mh.com](mailto:info@linde-mh.com)

Printed in Germany | 870.e.0,5.0421.lndA.se